



# MP-5123140-LSS


## Features:

**S**afe & **R**eliable

 Modular design, Parallel using

 One key on/off, redundancy protection.

 Live communication, and compatible with most leading LV inverters.

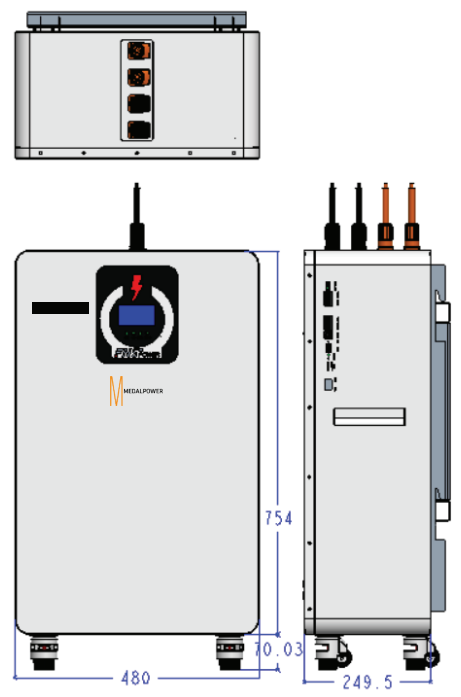

LEAVE POWER FOR MEDAL POWER

## MP-5123140-LSS

Battery Module	MP-5123140-LSS
Battery category	LiFePO <sub>4</sub>
Rated energy (kWh) (25 °C, 0.5C)	16.076
Rated voltage (V)	51.2
Rated capacity (Ah)	314
Max. charging and discharging current (A)	200
Charging and discharging current (A)	60A (Recommended)
Dimension (W*D*H, mm)	480*754*249.5
Weight (Kg)	126
Operating voltage (V)	43.2V-58.4V
Working temperature	0°C~45°C, Recommend 15°C~30°C
Communication	CAN/RS485
Degree of protection	IP20