

MP-122000-C2TJ

Features:







- High Acid volume per ampere hour to avoid battery going dry for longer life.
- Latest PE Industrial Sleeve Separator for double life.
- Deep Cycle Design for quick recovery from high depth of discharge.
- Low self-discharge for longer shelf life
- Resistance to abuse due to deep discharge
- Very Low maintenance.
- Heavy Duty Terminals suitable for carrying heavy current.
- Made of 99.97% purity which enhances performance.

Technical Specifications

C20					
Constant-Voltage Charge					
Model	Voltage	Capacity	Maximum Overall Dimension (mm)		
			Length	Width	Height
XPR-200LX	12V	200 Ah	503	190	406
Weight (Kg.)		61±3%			

Battery Discharge Table								
End Voltage(V)	Hour (H)							
	1	2	3	4	5	8	10	20
10.20	84.8	55.3	41.8	33.2	26.9	19.8	16.00	9.5
10.50	79.8	51.3	38.8	31.2	25.9	18.8	15.5	9.00
10.80	74.8	47.3	35.8	29.2	24.9	17.8	15.0	8.5

Constant power Discharge data sheet (Watt at 27 °C)								
10.20	1023	642	435	415	310	240	204	124
10.50	988	604	405	384	301	235	195	116
10.80	919	559	372	359	294	231	167	108

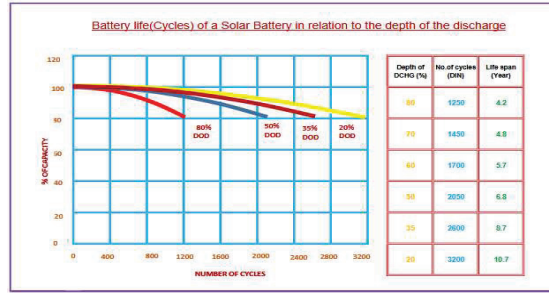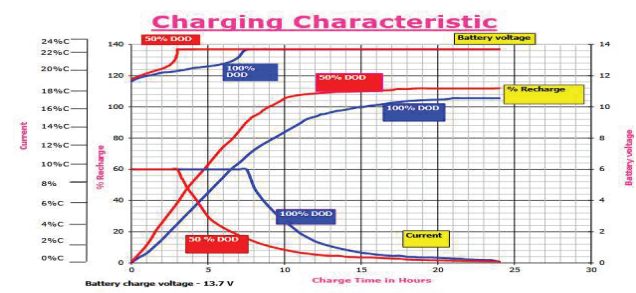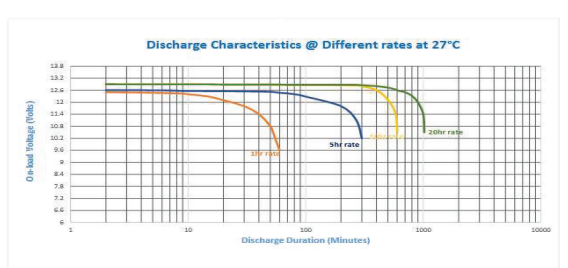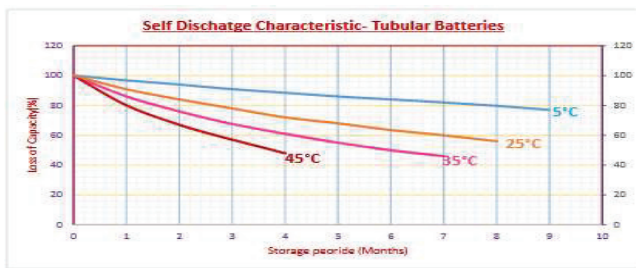

LEAVE POWER FOR MEDAL POWER