

MP-12200-GT

Features:

- >> All purpose
- >> Uninterruptable Power Supply (UPS)
- >> Electric Power System (EPS)
- >> Emergency backup power supply
- >> Emergency light
- >> Railway signal
- >> Aircraft signal
- >> Alarm and security system
- >> Electronic apparatus and equipment
- >> Communication power supply
- >> Auto controlsystem



Technical Specifications

Model	MP-12200-GT	
Nominal Voltage	12V	
Nominal Capacity(20HR)	20AH	
Dimension	Length	181 1mm (7.14 inches)
	Width	76 1mm (3.03 inches)
	Container Height	167 1mm (6.59 inches)
	Total Height (with Terminal)	167 1mm (6.59 inches)
Approx. Weight	Approx 5.3kg	
Terminal	T3	
Container Material	ABS	
Rated Capacity	17.0 AH/0.85A	(20hr ,1.80V/cell,25°C/77°F)
	15.7 AH/1.57A	(10hr,1.80V/cell,25°C/77°F)
	14.4 AH/2.88A	(5hr,1.75V/cell,25°C/77°F)
	13.0 AH/4.33A	(3hr,1.75V/cell,25°C/77°F)
	10.6 AH/10.6A	(1hr,1.60V/cell,25°C/77°F)
Max. Discharge Current	255A (5s)	
Internal Resistance	Approx. 16mΩ	
Operating Temp. Range	Discharge: -15 ~ 50°C (5 ~ 122°F)	
	Charge: 0 ~ 40°C (32 ~ 104°F)	
	Storage: -15 ~ 40°C (5 ~ 104°F)	
Nominal Operating Temp. Range	25 ± 3°C (77± 5°F)	
Cycle Use	Initial Charging Current less than5.1A. Voltage 14.4V~14.9V at 25°C (77°F) Temp. Coefficient -30mV/°C	
Standby Use	No limit on Initial Charging Current Voltage 13.5V~13.8V at 25°C (77°F) Temp. Coefficient -20mV/°C	
Capacity affected by Temperature	40°C (104 °F)	103%
	25°C (77 °F)	100%
	0°C (32 °F)	86%
Self-Discharge	MEDAL POWER batteries may be stored for up to 6 months at 25C (77°F) and battery should be recharge before use. for higher temperatures the time interval will be shorter.	

LEAVE POWER FOR MEDAL POWER

LEAVE POWER FOR MEDAL POWER


Constant Power Discharge (Watts) at 25 °C (77°F)

F.V/Time	5min	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	34.3	26.3	21.8	18.9	14.6	10.7	9.05	5.35	4.19	3.41	2.78	2.41	1.94	1.62	0.89
1.80V/cell	46.0	33.6	26.3	22.3	17.2	12.5	10.1	5.84	4.51	3.64	2.98	2.58	2.06	1.67	0.90
1.75V/cell	51.9	37.0	28.8	24.0	17.9	13.0	10.6	6.06	4.59	3.72	3.06	2.66	2.10	1.72	0.91
1.70V/cell	57.1	40.3	30.7	25.2	18.6	13.5	10.9	6.21	4.72	3.82	3.14	2.71	2.13	1.75	0.93
1.65V/cell	63.0	43.5	32.7	26.8	19.6	13.8	11.2	6.30	4.92	3.95	3.22	2.77	2.16	1.79	0.94
1.60V/cell	69.5	47.2	34.9	28.5	20.7	14.4	11.3	6.57	5.07	4.07	3.33	2.83	2.18	1.81	0.95


Constant Current Discharge (Amperes) at 25 °C(77°F)

F.V/Time	5min	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	62.7	48.6	40.7	35.5	27.8	20.6	17.5	10.4	8.16	6.66	5.45	4.74	3.84	3.21	1.77
1.80V/cell	83.2	61.4	48.5	41.4	32.3	23.8	19.5	11.3	8.74	7.07	5.82	5.06	4.06	3.31	1.78
1.75V/cell	91.8	66.4	52.3	44.1	33.2	24.5	20.3	11.6	8.86	7.20	5.95	5.18	4.12	3.39	1.80
1.70V/cell	98.3	70.7	55.1	46.0	34.4	25.4	20.8	11.9	9.09	7.38	6.09	5.28	4.17	3.46	1.83
1.65V/cell	106.9	75.6	58.1	48.5	36.0	25.8	21.2	12.0	9.44	7.61	6.24	5.38	4.23	3.52	1.85
1.60V/cell	115.2	80.2	61.1	51.1	37.7	26.7	21.3	12.5	9.68	7.82	6.42	5.48	4.26	3.56	1.86


Dimensions

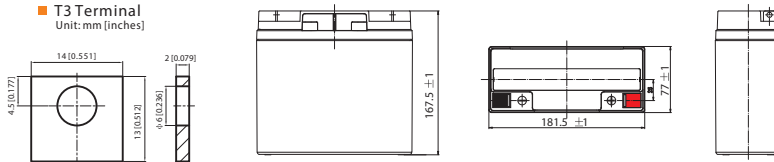


Cycle Life in Relation to Depth of Discharge

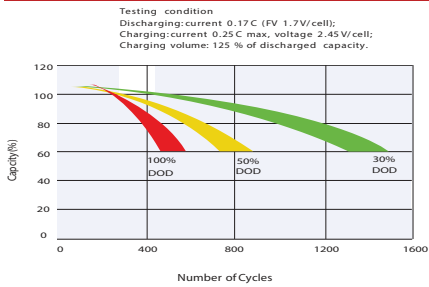


Float Charging Characteristics

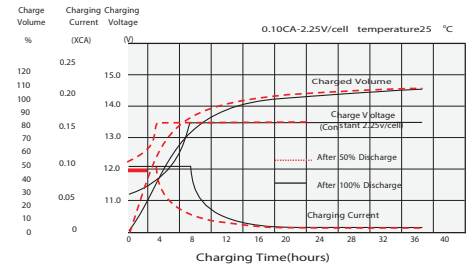


Effect of Temperature on Long Term Float Life

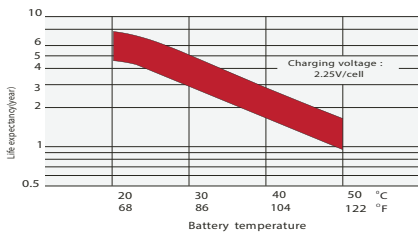

Temperature Effects in Relation to Battery Capacity

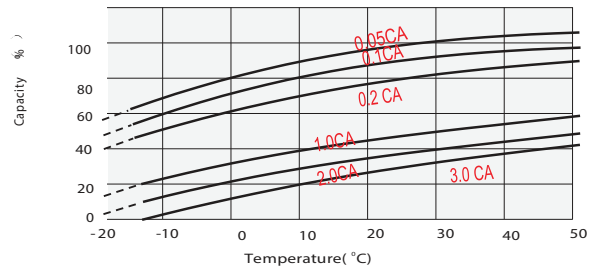

Self Discharge Characteristics

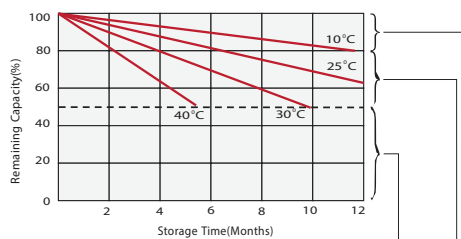

Supplementary charge may often fail to recover the capacity. The battery should never be left standing till this is reached.

Supplementary charge required before use. Optional charging way as below:
1.Charged for above 3 days at limited current 0.25CA and constant voltage 2.25V/cell.
2.Charged for above 20hours at limited current 0.25CA and constant voltage 2.45V/cell.
3.Charged for 8-10hours at limited current 0.05CA.

No supplementary charge required
(Carry out supplementary charge before use if 100% capacity is required.)

Discharge Characteristics

