


# MPI-1500VA#12VT

## Features:

- >> Pure sine wave output
- >> DC Start & Automatic Self-Diagnostic Function
- >> High Efficiency Design & "Power Saving Mode" to Conserve Energy
- >> Auto restart when AC in recovering
- >> Smart battery charger design for optimized battery performance
- >> Selectable charging current based on applications
- >> AC input/DC input/Solar input optional priority
- >> Auto Restart Voltage

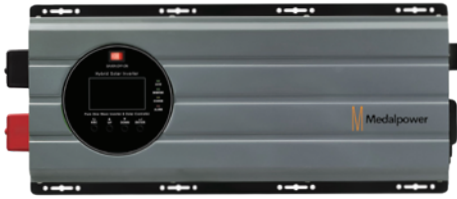

## Technical Specifications

Model	MPI-1500VA#12VT
Capacity (VA)	1500VA
Input Voltage (DC)	12V
Input Nominal Voltage	220VAC
Input Voltage Range	154-265VAC (AC Mode);185-264VAC±3V (UPS Mode)
Input Frequency	50-60HZ Auto sensing
Output Power Factor	0.8
Output Rated Power	1200W
Output Voltage	220VAC
Output Frequency	50/60HZ
Output Waveform	Pure Sine Wave
Output Transfer Time	<8ms
Output Bypass Mode	Yes
Output Saver Mode	Yes
Output Efficiency	>98%
Input Protection	Circuit Breaker
Output Protection	Circuit Breaker
Battery Type	AGM-Deep Cycle, Gel/Up to 500AH
Battery AC Charging	25A
Battery Low Level	10V or 10.5V
LCD indicator status	AC input voltage, AC input frequency, PV voltage, PV current, Output Voltage, Output Frequency, Battery voltage,
LED indicator status	AC Line In: Green/Inverter: Green/Charging: Yellow/Alarm: Red
Protections	Over load, over temp, over charging, battery low, battery reverse connects, high AC voltage etc.
Alarm LOW battery	Audible alarm-5 seconds beeping
Alarm Overload alarm	Audible alarm- continuous beeping
Alarm Fault	Audible alarm- continuous beeping
Environment Temperate	0-40°C
Humidity	—10°C~90°C Non condensing
Noise(dB)	>55dB
Size L*W*H(mm)	430*220*185mm
Packaging	560*335*250mm
Weight (kg)	11.1

LEAVE POWER FOR MEDAL POWER