

# MP-1270-AKR

## Features:

- >> The operating environment temperature above 40°C should be avoided , After long term storage, The battery actual capacity would be less than the rated capacity.
- >> Full capacity will be obtained through several charge/discharge cycles.
- >> To get the longest life,battery should be fully charged before storage.



## Technical Specifications

### Specifications

Nominal Voltage	12V	
Rated Capacity (20 hour rate)	7.0Ah	
Dimensions	Total Height (with terminals)	3.94 inches(100mm)
	Height	3.70 inches(94mm)
	Length	5.94 inches(151mm)
	Width	2.56 inches(65mm)
Weight	Approx.4.51 Pound(2.05kg)	

### Characteristics

Capacity 77°F (25°C)	20 hour rate (0.35A)	7.0 Ah
	10 hour rate (0.65A)	6.5 Ah
	5 hour rate (1.12A)	5.6 Ah
	1hour rate (4.20 A)	4.2 Ah
	15minute rate (12.3 A)	3.1 Ah
Internal Resistance	Full Charged Battery	22mΩ
	77°F (25°C)	
Capacity Affected by Temperature (20hour rate)	104°F (40°C)	102%
	77°F (25°C)	100%
	32°F (0°C)	85%
Self-Discharge 77°F (25°C)	Capacity after 3 months storage	91%
	Capacity after 6 months storage	81%
	Capacity after 12 months storage	60%
Max. Discharge Current 77°F (25°C)	105A(5S)	
Terminal	F1 \ F2	
Charge (Constant Voltage)	Cycle	Initial Charging Current Less than 2.1A
		Voltage 14.4 V / 77 °F (25 °C) Equalization temperature compensation coefficient: -24mV/°C
	Float	Voltage 13.8V / 77 °F (25 °C) Compensation coefficient of floating charging temperature: -18mV/°C


### Constant Current Discharge (Amperes @25°C)

EV/Time	5Min	10Min	15Min	30Min	60Min	2H	3H	4H	5H	10H	20H
1.60	26.7	16.9	12.3	7.56	4.45	2.61	1.80	1.40	1.15	0.669	0.359
1.65	26.0	16.5	11.9	7.36	4.37	2.52	1.77	1.37	1.14	0.653	0.356
1.70	24.9	15.8	11.4	7.22	4.29	2.49	1.76	1.36	1.14	0.653	0.353
1.75	23.8	15.1	11.2	7.14	4.20	2.46	1.76	1.34	1.12	0.650	0.350
1.80	22.4	15.0	10.9	6.94	4.12	2.38	1.73	1.33	1.10	0.638	0.342


### Constant Power Discharge (Watts Per Cell@25°C)

EV/Time	5Min	10Min	15Min	30Min	60Min	2H	3H	4H	5H	10H	20H
1.60	49.5	31.6	23.4	14.4	8.06	5.08	3.58	2.79	2.29	1.32	0.710
1.65	48.5	30.9	22.6	14.0	7.96	4.93	3.53	2.73	2.26	1.31	0.708
1.70	46.1	29.6	21.7	13.8	7.81	4.85	3.50	2.72	2.27	1.31	0.705
1.75	44.3	28.5	21.3	13.7	7.63	4.80	3.50	2.69	2.24	1.31	0.703
1.80	41.7	28.3	20.8	13.2	7.51	4.67	3.45	2.66	2.21	1.28	0.690

### Discharge Curves(25°C)

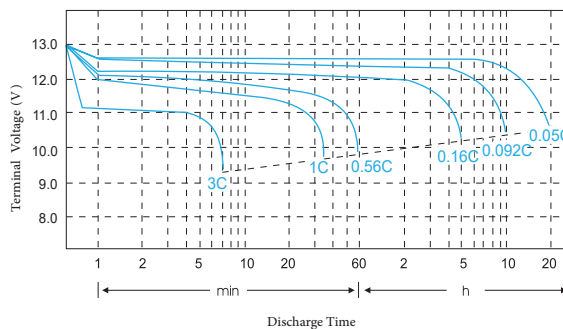


### Relationship Between Charge Voltage and Temperature

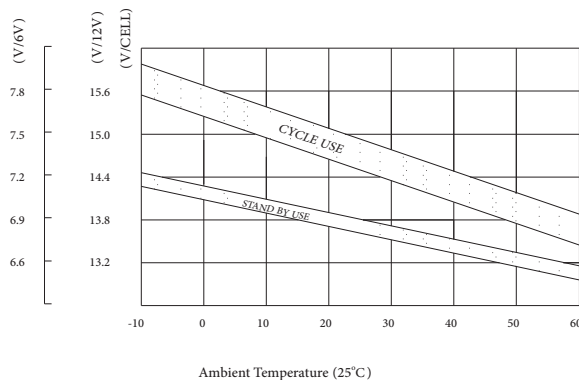


LEAVE POWER FOR MEDAL POWER


LEAVE POWER FOR MEDAL POWER

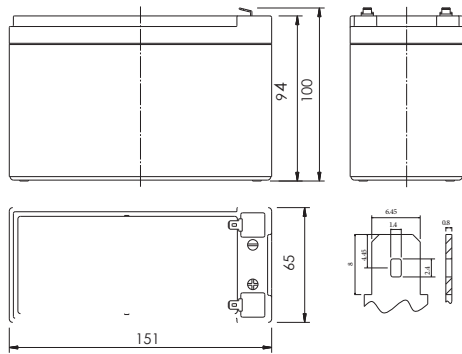


■ Cycle service life in relation to depth of discharge

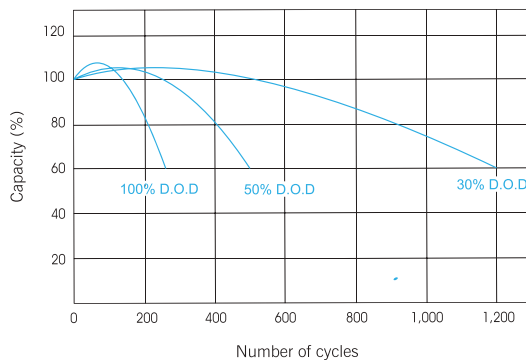


■ Constant voltage charge characteristic

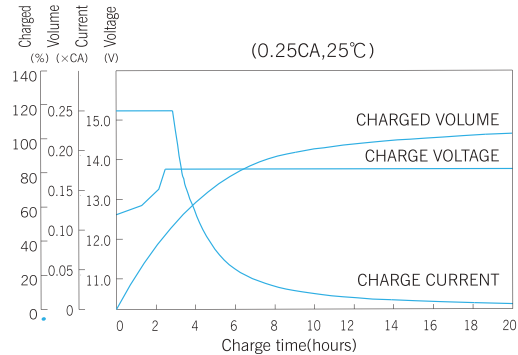


■ Self-Discharge Characteristics

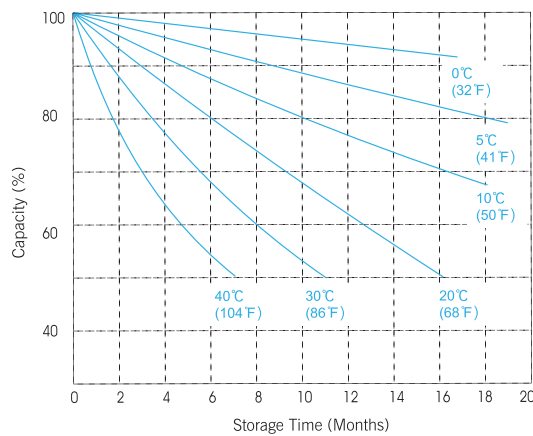

■ Relationship of OCV and Residual Capacity (%) (25°C)

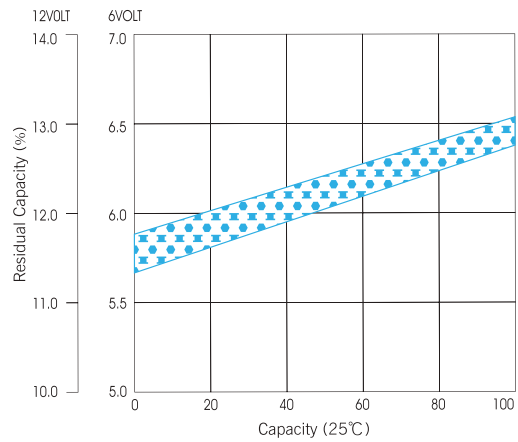

■ Temperature effects on capacity

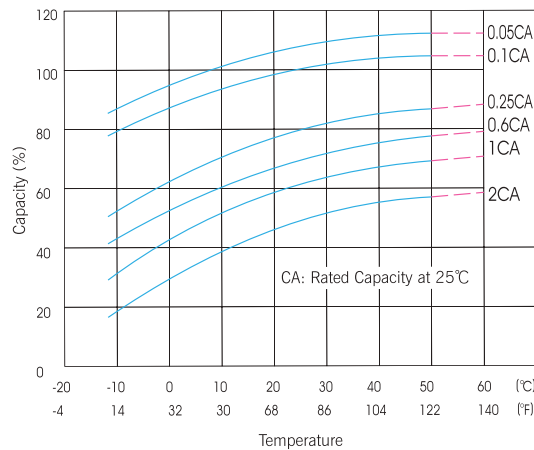

■ Temperature effects float life

